


Characteristics Thermoplastic Hot Melt adhesive, 100% solids content.
Low odor ,good bonding

Features	Properties	Specs	Testing Methods
	Base	Synthetic Rubber Copolymers	
	Shape	Block or Pillow	Observation
	Color	White	Observation
	Softening Point	85± 5℃	ASTM-E28 (R&B)
	Viscosity		Brookfield Viscometer RV-DVII spindle #27

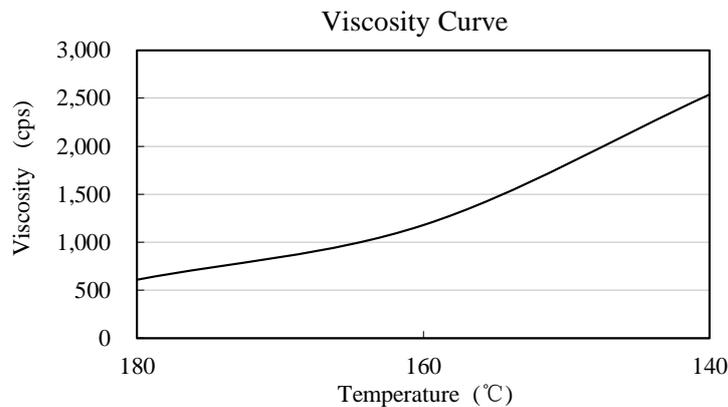

Instruction For Use

- 1.Operation Temperature : 140℃.
2. Application methods: Spray、 Slot.

Packaging 1. 25kg/bag.

Notice

1. Do not touch the molten adhesive. In case of burns from hot adhesive, immediately flush skin with cold water and cover with a clean dressing, do not remove adhesive. Have burn treated by a physician.
2. All surfaces should be clean and free of loose elements.
3. Do not heat the adhesive over 180℃ in prolonged time to avoid material decomposition and consequent decreased properties.
4. Please store hotmelt glue in well-ventilated place, away from direct sunshine.

Note Product color may vary due to different raw material batch. This variation does not impact on product properties.

Retention time : 5 years